

Lithium Manganese Battery Technology Specification

Customer _____**Part name** Lithium Manganese Battery
_____**Model No** CR17450SE 2400mAh 3.0V
_____**Serial No** _____**Produce No** _____

Approved by		Drafted by	Wenfei liang
Checked by		Signed by	Xiaojun Nie
Prepared by		Valid Date	2018-08-21

Company address: 4th Building, Meitai Technology Park, Guanguang
Road, Longhua, Shenzhen, China.

(Tel) : +86-755-86670672

(Fax) : +86-755-86670609

E-mail: pkcell@pkcell.net pkcell@pkcell.com

Website: <http://www.pkcell.net> <http://www.pkcell.com>

ADD: 4th Building, Meitai Technology Park, Guangguang Road, Longhua, Shenzhen, China. 518110

1. SCOPE

The specification applies to CR17450SE (Li/MnO₂) battery supplied by Shenzhen pkcell battery Co.,Ltd

2. Characteristics and Performance

Table1


Item	Storage	Performance	Test condition
Nominal Voltage	—	3.0V	—
Normal capacity	—	2400mAh	Continuous Discharge at 0.5mA To 2.0V at 23±2℃
Max.Constant Current	—	15mA	—
Max. Pulse Current	—	150mA	—
Working temperature	—	-40~+85℃	—
OCV	Fresh	3.1V~3.3V	DC Voltmeter: accuracy≥±0.005V Input impedance≥1MΩ
	After 12 months	3.1V~3.3V	
CCV	Fresh	≥3.00V	DC voltmeter: accuracy≥±0.005V load: 15kΩ for 0.8 sec.
	After 12 months	≥3.00V	

3. Precautions

- Never charge the battery as it is not designed to be rechargeable, may cause leakage or explosion.
- Insert battery with its positive and negative terminals properly aligned with the corresponding marks on the equipment.
- Never short circuit, heat, incinerate or dismantle the battery.

- 2 -

Fig1. Structure and Dimensions

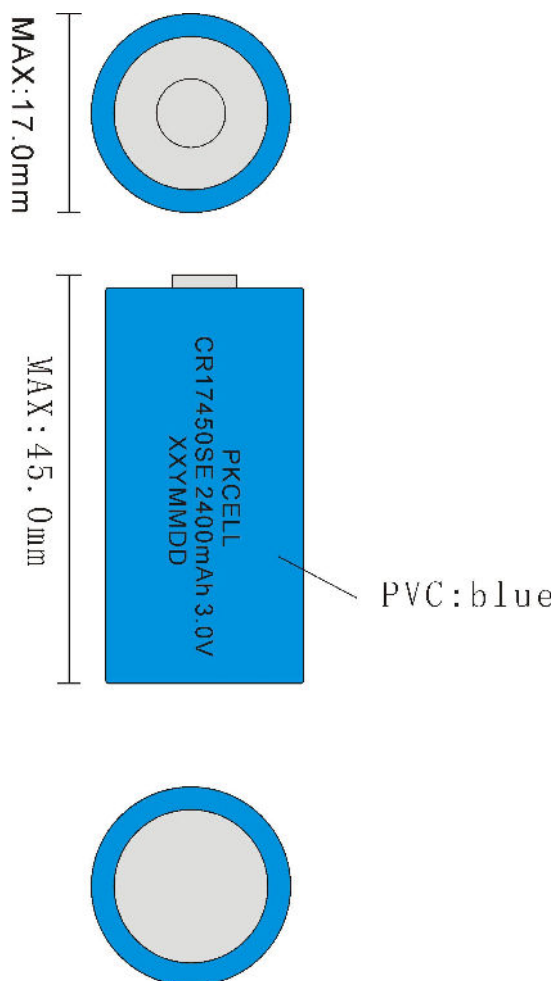

- 3 -

.....END.....