



Wireless VITRON™
Wireless Glassbreak Detector

Model: RWT6G

Installation instructions

1 General Description

The Wireless VITRON is an advanced microprocessor based Acoustic Glassbreak detector that detects the breaking of most common types of framed glass panes while ignoring false alarms.

Main Features

- Up to 9m detection range
- Suitable for most common glass types: plate, tempered, laminated and wired glass
- Minimum size for all types of glass: 30cm x 30cm (12" x 12").
- Wall and Front cover Tamper protection

Type of glass	Thickness
Plate	3.2 mm – 6.4mm (1/8"-1/4")
Tempered	
Laminated	
Wired	6.4 mm (1/4")

- Wireless VITRON will not alarm if glass pane is broken from inside or glass is dropped on floor.
- Optional ceiling/wall mount swivel adaptor for optimal mounting and performance (supplied with the Wireless VITRON).

2 Installation Procedure

Wireless VITRON range of coverage depends on the type of glass (see Table 1) and the installation angle between the Wireless VITRON and the glass (see Fig 1).

Plate			Tempered, Laminated, Wired		
Size	Thickness	Max. Range	Size	Thickness	Max. Range
Minimum 50x50cm (20"x20")	3.2 – 6.4mm (1/8"-1/4")	9m (30ft)	Minimum 30x30cm (12"x12")	6.4mm (1/4")	6m (20ft)
Minimum 30x30cm (12"x12")		6m (20ft)			

Table 1: Wireless VITRON range of coverage

Angle (degrees)	Percent of maximum range
0	10
12	95
30	87
45	70
60	50
75	25
90	0

Note: To improve detection, it is highly recommended to use a swivel adaptor, especially for ceiling and wall installations.




Fig 1: Percentage of Maximum Range as a function of angle between Wireless VITRON and glass.

Verify that the distance between the Wireless VITRON and the furthest point on the protected glass does not exceed the maximum specified range taking into account the reduced range due to angle (see Fig 2).




Fig 2: Angle between Wireless VITRON and glass

Other factors affecting range:

- There should be no obstructions between the Wireless VITRON and the protected glass.
- Curtains and blinds may reduce the effective range.
- Sound absorbing materials in the protected area may reduce the range.

3 Mounting Location

For optimal performance the Wireless VITRON should be mounted as nearly opposite to the glass area to be protected, as shown in Fig 3.

Attach the Glassbreak detector to the surface using the adhesive strips.




Fig. 3




Fig. 4




Fig. 5




Fig. 6

- **Opposite Wall – Mounted** (For optimal results, Wireless VITRON is centered opposite glass, see Fig. 3).

- **Ceiling Mounted** (for optimal results Wireless VITRON is centered and directed towards protected glass, using the supplied swivel adaptor, see fig. 4)

- **Corner Mounted** (choose corner opposite glass to be protected, see fig. 5)

- **Side wall – mounted** not recommended due to the fact that the Wireless VITRON is not opposite the glass - see range versus angle diagram (Fig 2).

Notes:

1. Do not mount Wireless VITRON on same wall as the protected glass.
2. Avoid installing the Wireless VITRON near sources of loud noise or vibrations (air conditioners, fans, compressors, stereos, etc).
3. Avoid defining the Wireless VITRON as a 24 hour zone.
4. The Wireless VITRON should always be installed in addition to standard motion detectors.

4 Mounting




Fig. 7: Opening the detector cover

1. Open the Wireless VITRON cover using a flat screwdriver.
2. Open the required mounting knockouts, according to the type of installation (corner, flat or swivel mounting, see Fig. 8).
3. Use the detector's back plate as a template and mark the drilling holes on the required position.

Note: Remove the PCB only if corner mounting or optional swivel mounting adaptor is used.

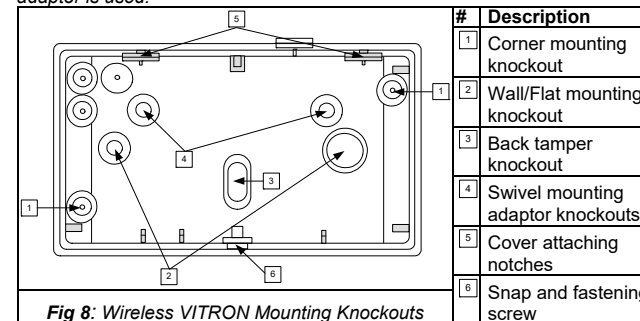


Fig 8: Wireless VITRON Mounting Knockouts

3. If a back tamper protection is required open the back tamper knockout (3, Fig.8).
4. Secure the back plate to the wall using the supplied screws. Snap back the PCB (if removed).
5. Insert battery in place according to the correct polarity (polarity marks – on PCB).

5 Swivel Mounting

When installing the Wireless VITRON with the supplied swivel mounting adaptor, maximum installation flexibility and performance is achieved.

To install the swivel mounting adaptor perform the following:

1. Remove the PCB from the Wireless VITRON back plate
2. Open the swivel mounting adaptor knockouts.
3. Attach the swivel mounting adaptor to the back plate using the two supplied screws (1, Fig 9).
4. Mount the Wireless VITRON on the required location (wall or ceiling) using the supplied screws (2, Fig 9). Do not tighten the screws.
5. Adjust the detector so it will face the protected glass.
6. Tighten the bolts to the final torque.




Fig. 9: Swivel Mounting

6 PCB Main Components

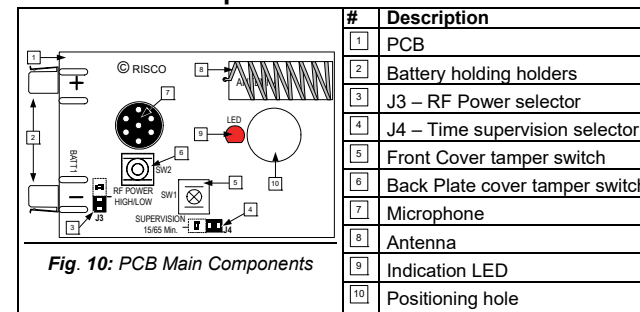




Fig. 10: PCB Main Components

7 Quick Device Allocation

The VITRON must identify itself to the WiComm Smart Hub. This can be performed either using the RISCO Express Wizard (www.riscocloud.com/express) by adding the extra sensor at the same time of the Smart Hub system installation or later either by using the "Settings" on the Web (www.riscocloud.com) or using the WiComm Smart Hub, as follows:

1. Press the  button on the WiComm Smart Hub for 5 seconds; the unit beeps once as it enters Learn mode (all the LEDs also light up, one after the other).
2. Open the Wireless VITRON cover using a flat screwdriver and remove the sensor's red battery isolation strip).
3. Press the Front Tamper Cover switch to send a signal transmission; the WiComm Smart Hub beeps once to accept or beeps three times to reject. Once accepted, the system announces the device type and its zone (for example, "Sensor, zone 1").
4. To complete allocation momentarily press WiComm Smart Hub button . A short beep is heard and the LEDs stop flashing.
5. Mount the detector.
6. You can change the zone labels through the www.riscocloud.com website (for details, see the Reference Manual).

Note: For future use, it is recommended to write down the sensor description, zone number, and installation location of each allocated detector.

The Wireless VITRON has 3 operation modes:

Normal: Any loud sound such as clapping, whistling or key-jingling should produce a flash of the VITRON's LED. This verifies that the Wireless VITRON is active. During active supervision, there is no transmission. To save power consumption the LED is activated up to 800 times per day.

Alarm: On detection of framed glass being broken from outside the LED will light continuously for 2 seconds and an alarm transmission is sent.

Test: See Test paragraph

8 Testing the Wireless VITRON

Testing under Test mode

Step 1: Entering the test mode

The Wireless VITRON enters the Test mode for two minutes after closing the front cover. After that it moves to Normal operation mode. During test mode you can perform the following 2 tests:

Step 2. Environmental Test

This test is performed to verify interference produced by environmental conditions or facilities.

To perform the test, operate all devices in the protected region that may interfere with the detector, including air conditioners, fans, radios etc.

Observe the wireless VITRON and note any disturbances. If disturbances occur, place the unit in a different position and test it again.

Turn all noise generating equipment off and wait until the unit returns to NORMAL mode.

Step3. User test

The Wireless VITRON can be tested while in normal mode by clapping or whistling or key-jingling under the detector. The LED will flash. No report will be generated.

9 Jumpers settings

Please do not change the jumper settings.

10 Technical Specifications

Electrical	
Current consumption (standby)	22 uA at 3 VDC, without acoustic signal
Current consumption (Alarm transmission)	10 mA at 3 VDC (Max. with LED OFF) 15 mA at 3 VDC (Max. with LED ON)
Modulation type	ASK
Battery life	3 years, at 65 minutes supervision
Range (LOS)	300m (1000 feet)
Voltage requirements	CR123A 3VDC Lithium Batteries
Frequency	915MHz
Physical	
Size (LxWxD)	87 x 50.7 x 28.6 mm (3.4 x 2.0 x 1.1 in.)
Environmental	
Operating/Storage temperature	0°C to 50°C (-32°F to 122°F)
* Specifications are subject to change without prior notice	

Standard Limited Product Warranty ("Limited Warranty")

RISCO Ltd. ("RISCO") guarantee RISCO's hardware products ("Products") to be free from defects in materials and workmanship when used and stored under normal conditions and in accordance with the instructions for use supplied by RISCO, for a period of (i) 24 months from the date of delivery of the Product (the "Warranty Period"). This Limited Warranty covers the Product only within the country where the Product was originally purchased and only covers Products purchased as new.

Contact with customers only. This Limited Warranty is solely for the benefit of customers who purchased the Products directly from RISCO or from an authorized distributor of RISCO. RISCO does not warrant the Product to consumers and nothing in this Warranty obligates RISCO to accept Product returns directly from end users who purchased the Products for their own use from RISCO's customer or from any installer of RISCO, or otherwise provide warranty or other services to any such end user directly. RISCO's authorized distributor or installer shall handle all interactions with its end users in connection with this Limited Warranty. RISCO's authorized distributor or installer shall make no warranties, representations, guarantees or statements to its end users or other third parties that suggest that RISCO has any warranty or service obligation to, or any contractual privity with, any recipient of a Product.

Remedies. In the event that a material defect in a Product is discovered and reported to RISCO during the Warranty Period, RISCO shall accept return of the defective Product in accordance with the below RMA procedure and, at its option, either (i) repair or have repaired the defective Product, or (ii) provide a replacement product to the customer.

Return Material Authorization. In the event that you need to return your Product for repair or replacement, RISCO will provide you with a Return Merchandise Authorization Number (RMA#) as well as return instructions. Do not return your Product without prior approval from RISCO. Any Product returned without a valid, unique RMA# will be refused and returned to the sender at the sender's expense. The returned Product must be accompanied with a detailed description of the defect discovered ("Defect Description") and must otherwise follow RISCO's then-current RMA procedure published in RISCO's website at www.riscogroup.com in connection with any such return. If RISCO determines in its reasonable discretion that any Product returned by customer conforms to the applicable warranty ("Non-Defective Product"), RISCO will notify the customer of such determination and will return the applicable Product to customer at customer's expense. In addition, RISCO may propose and assess customer a charge for testing and examination of Non-Defective Product.

Entire Liability. The repair or replacement of Products in accordance with this Limited Warranty shall be RISCO's entire liability and customer's sole and exclusive remedy in case a material defect in a Product is discovered and reported as required herein. RISCO's obligation and this Limited Warranty are contingent upon the full payment by customer for such Product and upon a proven weekly testing and examination of the Product functionality.

Limitations. This Limited Warranty is the only warranty made by RISCO with respect to the Products. The warranty is not transferable to any third party. To the maximum extent permitted by applicable law, this Limited Warranty shall not apply and will be void if: (i) the conditions set forth above are not met (including, but not limited to, full payment by customer for the Product and a proven weekly testing and examination of the Product functionality); (ii) if the Products or any part or component thereof: (a) have been subjected to improper operation or installation; (b) have been subject to neglect, abuse, willful damage, abnormal working conditions, failure to follow RISCO's instructions (whether oral or in writing); (c) have been misused, altered, modified or repaired without RISCO's written approval or combined with, or installed on products, or equipment of the customer or of any third party; (d) have been damaged by any factor beyond RISCO's reasonable control such as, but not limited to, power failure, electric power surges, or unsuitable third party components and the interaction of software therewith or (e) any failure or delay in the performance of the Product attributable to any means of communication provided by any third party service provider, including, but not limited to, GSM interruptions, lack of or internet outage and/or telephony failure. BATTERIES ARE EXPLICITLY EXCLUDED FROM THE WARRANTY AND RISCO SHALL NOT BE HELD RESPONSIBLE OR LIABLE IN RELATION THERETO, AND THE ONLY WARRANTY APPLICABLE THERETO, IF ANY, IS THE BATTERY MANUFACTURER'S WARRANTY. RISCO does not install or integrate the Product in the end user's security system and is therefore not responsible for and cannot guarantee the performance of the end user's security system which uses the Product or which the Product is a component of.

This Limited Warranty applies only to Products manufactured by or for RISCO. Further, this Limited Warranty does not apply to any software (including operating system) added to or provided with the Products or any third-party software, even if packaged or sold with the RISCO Product. Manufacturers, suppliers, or third parties other than RISCO may provide their own warranties, but RISCO, to the extent permitted by law and except as otherwise specifically set forth herein, provides its Products "AS IS". Software and applications distributed or made available by RISCO in conjunction with the Product (with or without the RISCO brand), including, but not limited to system software, as well as P2P services or any other service made available by RISCO in relation to the Product, are not covered under this Limited Warranty. Refer to the Terms of Service at: <https://riscocloud.com/ELAS/WebUI/UserLogin/License> for details of your rights and obligations with respect to the use of such applications, software or any service. RISCO does not represent that the Product may not be compromised or circumvented; that the

Product will prevent any personal injury or property loss by burglary, robbery, fire or otherwise, or that the Product will in all cases provide adequate warning or protection. A properly installed and maintained alarm may only reduce the risk of a burglary, robbery or fire without warning, but it is not insurance or a guarantee that such will not occur or will not cause or lead to personal injury or property loss. CONSEQUENTLY, RISCO SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON ANY CLAIM AT ALL INCLUDING A CLAIM THAT THE PRODUCT FAILED TO GIVE WARNING.

EXCEPT FOR THE WARRANTIES SET FORTH HEREIN, RISCO AND ITS LICENSORS HEREBY DISCLAIM ALL EXPRESS, IMPLIED OR STATUTORY, REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS WITH REGARD TO THE PRODUCTS, INCLUDING BUT NOT LIMITED TO ANY REPRESENTATIONS, WARRANTIES, GUARANTEES, AND CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE AND WARRANTIES AGAINST HIDDEN OR LATENT DEFECTS, TO THE EXTENT PERMITTED BY LAW. WITHOUT LIMITING THE GENERALITY OF THE FOREGOING, RISCO AND ITS LICENSORS DO NOT REPRESENT OR WARRANT THAT: (i) THE OPERATION OR USE OF THE PRODUCT WILL BE TIMELY, SECURE, UNINTERRUPTED OR ERROR-FREE; (ii) THAT ANY FILES, CONTENT OR INFORMATION OF ANY KIND THAT MAY BE ACCESSED THROUGH THE PRODUCT SHALL REMAIN SECURED OR NON DAMAGED. CUSTOMER ACKNOWLEDGES THAT NEITHER RISCO NOR ITS LICENSORS CONTROL THE TRANSFER OF DATA OVER COMMUNICATIONS FACILITIES, INCLUDING THE INTERNET, GSM OR OTHER MEANS OF COMMUNICATIONS AND THAT RISCO'S PRODUCTS, MAY BE SUBJECT TO LIMITATIONS, DELAYS, AND OTHER PROBLEMS INHERENT IN THE USE OF SUCH MEANS OF COMMUNICATIONS. RISCO IS NOT RESPONSIBLE FOR ANY DELAYS, DELIVERY FAILURES, OR OTHER DAMAGE RESULTING FROM SUCH PROBLEMS. RISCO WARRANTS THAT ITS PRODUCTS DO NOT, TO THE BEST OF ITS KNOWLEDGE, INFRINGE UPON ANY PATENT, COPYRIGHT, TRADEMARK, TRADE SECRET OR OTHER INTELLECTUAL PROPERTY RIGHT IN ANY EVENT RISCO SHALL NOT BE LIABLE FOR ANY AMOUNTS REPRESENTING LOST REVENUES OR PROFITS, PUNITIVE DAMAGES, OR FOR ANY OTHER INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, EVEN IF THEY WERE FORESEEABLE OR RISCO HAS BEEN INFORMED OF THEIR POTENTIAL.

WARNING: This product should be tested at least once a week.

CAUTION: Risk of explosion if battery is replaced by an incorrect type. Dispose of used batteries according to local regulations.

FCC ID: JE4RWT6G915, IC: 6564A-RWT6G915

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

Changes or modifications to this equipment which are not expressly approved by the party responsible for compliance (RISCO Group's.) could void the user's authority to operate the equipment.

FCC Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- ◆ Reorient or relocate the receiving antenna.
- ◆ Increase the separation between the equipment and the receiver.
- ◆ Connect the equipment into an outlet on a different circuit from that to which the receiver is connected.
- ◆ Consult the dealer or an experienced radio/TV technician for help.

IC Warning

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement