

GD 335

Glass Break Detector, Glued




Technical data

Maximum coverage	2 m radio (standard 3 mm glass)
Approvals	EN 50131-2-7-2:2013 Grade 2, VdS Klass B - G192532, SBSC 10-32, Class 2
Supply voltage	4-15 VDC
Current consumption	5 µA (7.5 mA alarm)
Alarm output	transistor output
Alarm indication	LED
Alarm hold time	Latching
Alarm reset	Power down
Connection	Cable
Housing material	ABS Plastic
Colour	White
Operating temperature range	-40°C - +70°C
Housing protection class	IP 67
Dimensions (H x Ø) mm	11 x 27
Grade	2



The GD 335 is a glass break detector with transistor output that is connected to a control panel via an IU 300 interface unit. It is especially designed for monitoring shop windows, sliding glass doors, ordinary windows and other exposed glass surfaces, both in public spaces and private homes. It can be used on windows with protective film if the detector is mounted directly onto the glass and not on the film (a 5-10 cm hole must be cut out the film). It can also be used on glass cabinets to protect various types of equipment. The GD 335 glass break detector is activated when the glass is shattered or broken and is highly resistant to interference with the glass or in its immediate environment, which makes it ideal for 24-hour monitoring. Its circular design guarantees correct positioning. The GD 335 is glued to the glass pane and each detector is supplied with a stencil to mark the mounting location, a glue applicator and cable clamps for quick and easy installation.


For laminated glass please use GD 475.

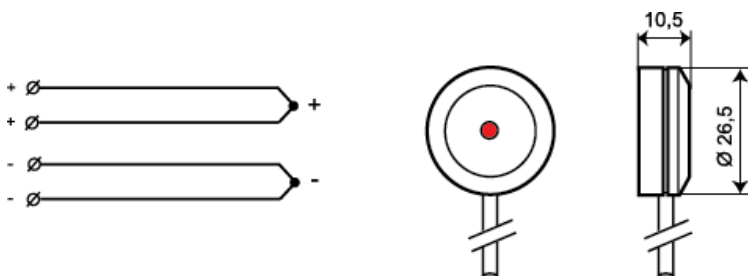

ORDERING INFORMATION

Model	Description
GD 335	Glass break detector with transistor output, glued, 3 m cable
GD 335-6	Glass break detector with transistor output, glued, 6 m cable
GD 335-10	Glass break detector with transistor output, glued, 10 m cable

Related products and accessories

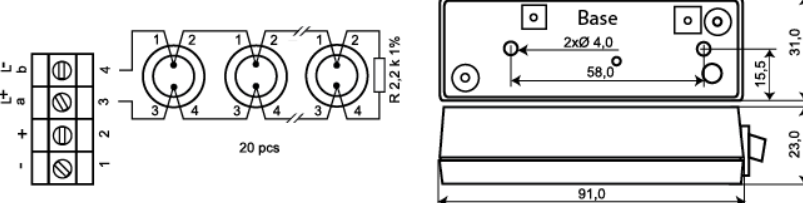	IU 300 Interface unit for GD 335 and GD 375	
	CG 100 Cable Conduit	
	GDK 100 Adhesive Kit	
	GVT 500 DISCONTINUED - Replaced by GVT 5000 Test unit for GD 300/GD 400 Glass Break Detectors.	
	GVT 5000 Test Unit for Glass Break and Vibration Detectors	

Related products and accessories**JB 102**

Junction box, 12
screw terminals

